Hush door perimeter seal kit


Close the gaps. Improve the quiet.

The Hush Door Perimeter Seal Kit addresses the gaps that allow hallway voices and everyday noise to pass around an otherwise solid door. Adjustable seals at the head and both jambs work with an automatic door bottom to create a continuous seal when the door closes. Durable aluminum housings and resilient neoprene gaskets provide a practical upgrade for suitable existing doors. Careful adjustment and consistent contact help improve speech privacy while preserving smooth door operation.



EXISTING DOOR

WITH HUSH SEAL KIT



Complete sealing around the opening.

Three perimeter sections plus one automatic door bottom. Adjustable fit, durable aluminum and neoprene seals.

Finishes: Silver (standard), Brown and Gold. Installation hardware included.

Two components. One kit.






Perimeter seal

Adjustable gasketing seals the head and both jambs. Consistent compression reduces airborne sound leakage around the frame and helps improve speech privacy.

Automatic door bottom

The seal drops as the door closes and retracts when it opens. Its drop height is adjusted to meet the floor without dragging, closing the sound path beneath the door.

PROFILE DETAILS

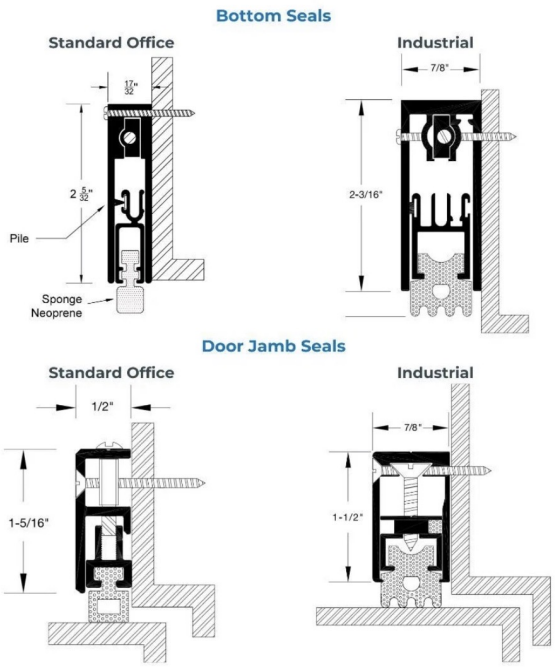

Dimensions in inches. Standard Office and Industrial profiles shown. Drawings not to scale.

REFERENCE PERFORMANCE

Property / test method	Result
Fire rating UL 10B, NFPA 252, ASTM E152	**Pass**
Positive pressure UL 10C, Category J	**Pass**
Air leakage UL 1784	**Pass**
Air infiltration E283-73 and SDI 116	**Pass***

* Air infiltration result applies to Industrial only.

STC 45 Reference solid core door 1¾ in. thick · 7 lb/ft²

Rating applies to the complete door assembly.

Reference data from supplied product literature. STC describes the complete door assembly; installed results depend on the door, frame, fit and surrounding construction. Confirm applicable product listings for rated openings.